



TECHNICAL DATA / DONNÉES TECHNIQUES / DATI TECNICI


Fluid / Fluide / Fluido	Air / Air / Aria		
Maximum pressure / Pression Max / Pressione Max	15 bar		
Temperature / Température / Temperatura	-10 / +50° C		
Regulation range / Grade de regulation / Campo di regolazione	5 - 20 - 50µm		
6 bar flow rate with Δp 1bar / Débit à 6 bar avec Δp à 1bar / Portata a 6 bar con Δp 1bar	1=1650 NI/min	2=300NI/min	3=4500NI/min
Bowl capacity / Volume / Capacità tazza	1=22cm ³	2=46cm ³	3=89,5cm ³
Regulation range / Plage de régulation / Campo di regolazione	0-2bar	0-4bar	0-8bar standard 0-12bar
Wall clamping screws / Vis pour fixations / Viti per fissaggio	1=M4X14	2=M5X18	3=M6X20

STANDARD PRODUCTS / PRODUIT STANDARD / PRODOTTI STANDARD

Code Code Codice	Size Taille Taglia	Thread Filetage Filetto	Filtration Filtration Filtrazione	Flow rate Débit Portata	Regulation Régulation Regolazione	Exhaust Purge Scarico
XP12231	1	1/4	20µm	1650NI/min	0 - 8bar	S/M
XP13231	1	3/8	20µm	1650NI/min	0 - 8bar	S/M
XP23231	2	3/8	20µm	3000NI/min	0 - 8bar	S/M
XP24231	2	1/2	20µm	3000NI/min	0 - 8bar	S/M
XP24232	2	1/2	20µm	3000NI/min	0 - 8bar	A
XP35231	3	3/4	20µm	4500NI/min	0 - 8bar	S/M
XP36231	3	1"	20µm	4500NI/min	0 - 8bar	S/M
XP36232	3	1"	20µm	4500NI/min	0 - 8bar	A

S/M: Semi automatic/Manual / Semi automatique/Manuelle / Semiautomatico/Manuale
A: Automatic / Automatique / Automatico

ORDERING CODE / CODIFICATION / CHIAVE DI CODIFICA

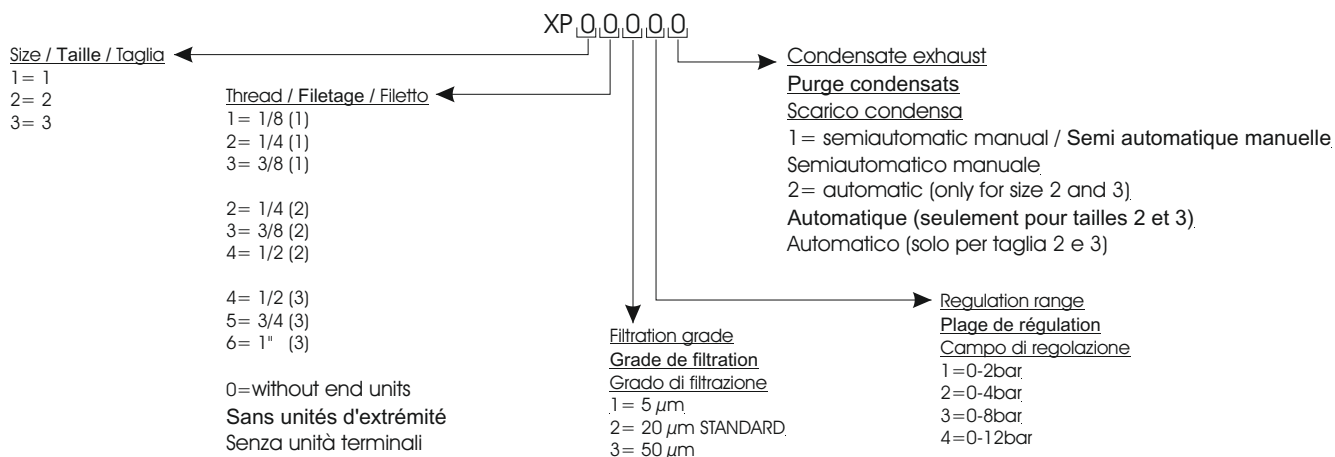

FLOW CHARACTERISTICS / COURBES DE DEBIT / CARATTERISTICHE DI FLUSSO

